



RANGE OF SCREW COMPRESSORS 37-132 Kw iCD-LP
DIRECT TRANSMISSION, VARIABLE SPEED
WITH PERMANENT MAGNET MOTOR





I.E.S (Innovative Energy Solutions)

Twenty years of experience acquired in the field of compressed air have allowed IES to plan a complete range of systems for supplying compressed air: plants for production, treatment and distribution, particularly innovative and elegant, which combine the merits of quality and reliability with a particular attention to the user's requirements.

As well as offering a complete range of technological solutions for compressed air production, IES is committed to understanding your sector, your requirements and your production and service needs, to ensure you of the best solutions for achieving your business.


Energy saving is the inspiring principle of our design: IES innovative products are based on sustainability, creating an opportunity to guarantee new solutions for long-term business strategies.

The new iCD-LP range of innovative screw compressors opens a new generation in the compressed air sector.



Complete with frequency converter for operation at variable speed and equipped with a motor with permanent magnet technology, it allows energy saving of as much as 50% while maintaining great reliability and excellent performance in extremely harsh environmental conditions.



The **iCD-LP** range offers numerous innovative characteristics that allow low working costs thanks to the combination of synchronous motors with permanent magnets and frequency converters, the most innovative technology today in variable-speed electrical controls.

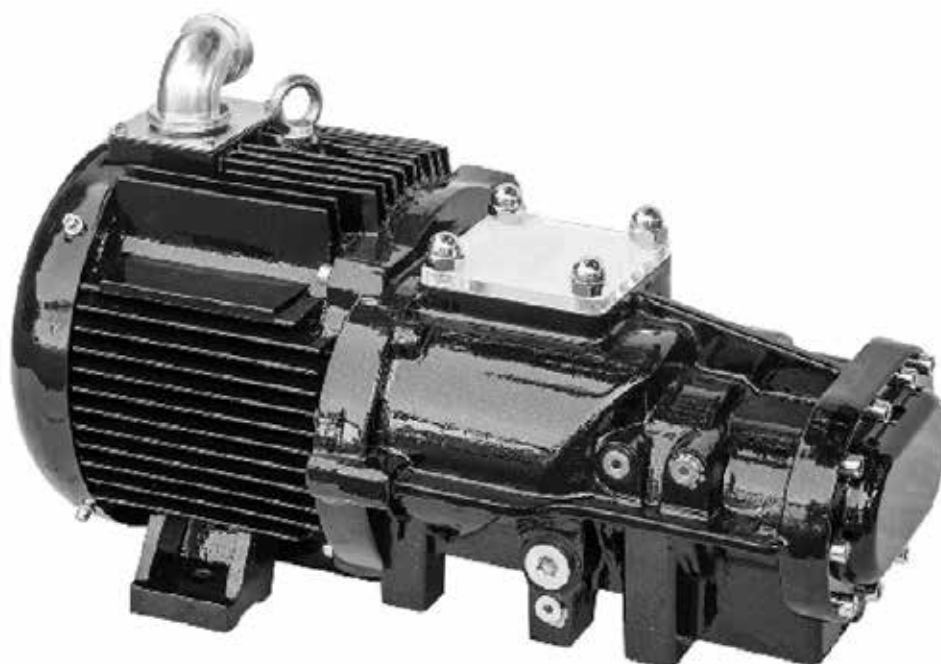

The permanent magnet motor that directly drives the compressor does not have any bearings, flexible couplings or sealing gaskets for the motor shaft, thus eliminating all parts subject to wear, leakage and replacement.

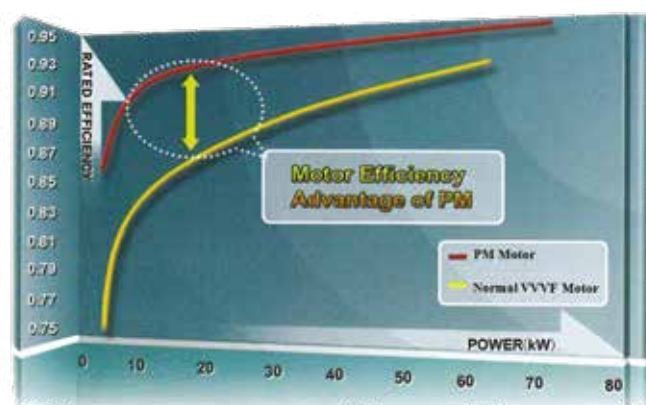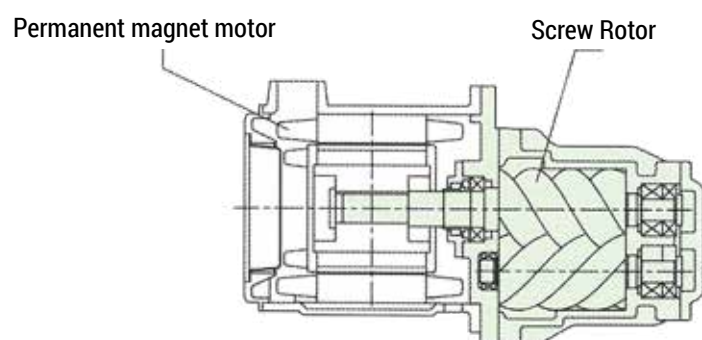




IES variable speed adjustment, together with the use of the permanent magnet motor with direct transmission, allows energy saving and a substantial reduction of compressor maintenance expenses, cutting costs by 50%.

Variable Speed Adjustment

The use of a frequency converter allows:

- Variation of the motor and of the compressor speed, adapting to the demand for compressed air;
- Variation of the air pressure selection value between 6 and 10. BAR;

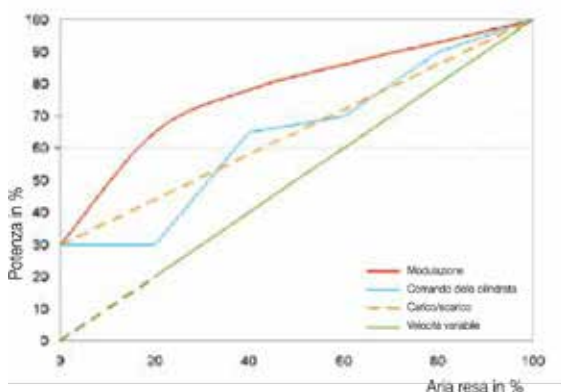

- Constant variation of compressed air production between 20 and 100% of the compressor capacity, allowing a variation of energy consumption proportional to the compressor air delivery;
- Elimination of problems linked to surge currents when starting;
- Elimination of discharge losses during normal operation.



Electronic controller iSTATION 4.0

- Clear and rational touch display;
- Setting and control of the main operating parameters;
- Complete menu in 20 languages;
- Daily or weekly start-up schedule;
- ISC system allowing simultaneous connection of up to 8 different compressors (fixed or variable speed) with "master slave" logic via a dedicated module.



Remote control and preventive maintenance with monitoring of correct compressor operation and maintenance timing is possible via LAN connection and optional IOT device.

On-line verification of:

- Compressor status;
- Display of temperature, pressure, power consumption parameters with daily and weekly graph;
- Monitoring of events and alarms;
- Predictive maintenance monitoring;
- Energy costs.



AIRSTATION is the brain that is locally installed and digitally connected via cloud or LAN.

It can handle a large number of compressors, even of other brands, with fixed and variable speed.

AIRSTATION responds to feedback in real time and automatically adjusts settings and performance levels, 24 hours a day, 365 days a year.

Saving with energy recovery

Rising energy costs and the depletion of traditional energy sources are leading more and more companies to significantly reduce their overall energy consumption with innovative energy-saving solutions.



A considerable part of the energy spent on compressing air is converted into heat and is generally lost through coolers.

The exchange systems designed by IES allow most of this heat to be recovered in the form of 80-85°C hot water with a module integrated in the compressor.

The investment is relatively modest and the financial payback time is usually very short.



- ① **Suction filter** able to remove the smallest particles of dust, the large surface ensures a long life and minimum pressure loss.
- ② **Single screw-motor element** with permanent magnets produced for maximum efficiency and excellent reliability.
- ③ Low-speed **radial fan** able to generate a high flow of cooling air while maintaining low noise.
- ④ **Air/oil radiator** abundantly sized to ensure optimum working temperatures in any environmental condition, easy to clean.
- ⑤ **Air/oil separator filter** able to ensure an impurity residue of 2 ppm, reducing maintenance times.
- ⑥ **Air/oil separator tank**, the exclusive cyclone technology guarantees a pre-separation efficiency of more than 99.9%. Provided with optional oil heater..
- ⑦ Vector type **speed varying inverter** with exceptional features for energy saving

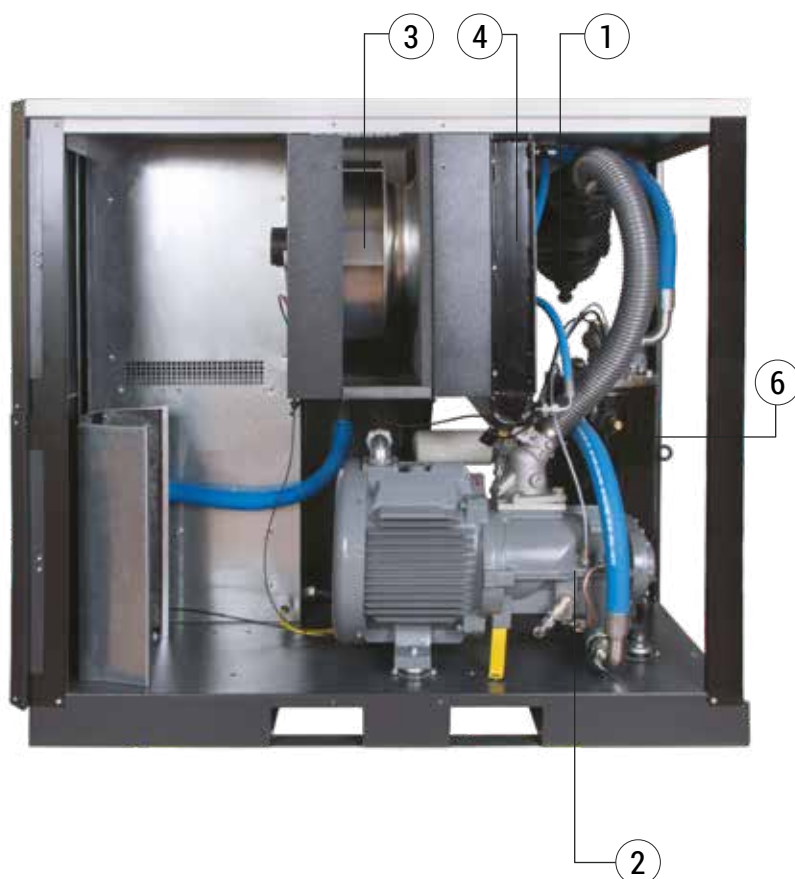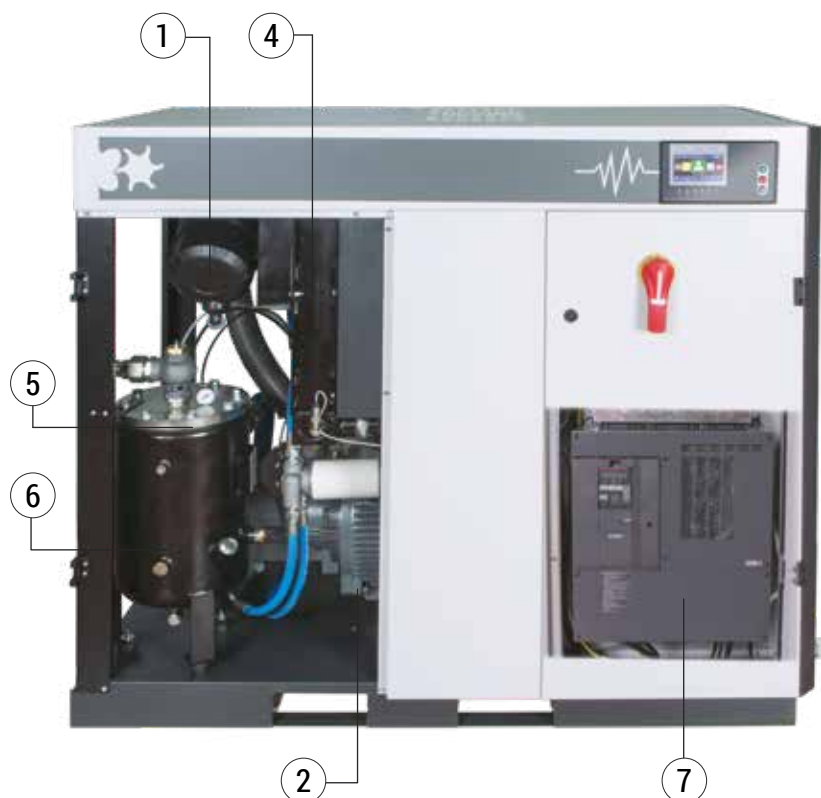



- Cooling by two centrifugal fans: oil side and air side
- Low power consumption
- Optimal cooling flow
- Extremely quiet high-pressure centrifugal fans



- High efficiency new series
- Suitable for temperatures up to 50°C
- Ongoing monitoring of the level achieved in reducing consumption

- Integrated condensate separator in the whole range
- Up to 90% reduction in condensation
- Energy recovery (optional)



Range of screw compressors 37-132 Kw iCD-LP direct transmission, variable speed with permanent magnet motor.



MODEL	MAXIMUM PRESSURE		F.A.D.		MOTOR		NOISE LEVEL
	bar	Psi	m ³ /min	c.f.m.	kw	hp	dB(A)
iCD37-LP	3	43,5	1,80 - 11,00	63,7 - 388,5	37	50	70
iCD37-LP	4	58	2,19 - 9,50	77,4 - 335,5	37	50	70
iCD55-LP	3	43,5	3,40 - 17,70	120,2 - 625,1	55	75	72
iCD55-LP	4	58	4,04 - 15,50	142,8 - 547,4	55	75	72
iCD75-LP	3	43,5	3,85 - 23,90	136,1 - 844,0	75	100	72
iCD75-LP	4	58	4,02 - 19,70	142,0 - 695,7	75	100	72
iCD90-LP	3	43,5	3,95 - 26,98	136,1 - 1619,0	90	125	72
iCD90-LP	4	58	4,49 - 23,20	158,6 - 819,3	90	125	72
iCD110-LP	3	43,5	7,40 - 33,99	261,3 - 1200,3	110	150	74
iCD110-LP	4	58	4,90 - 29,61	173,0 - 1045,7	110	150	74
iCD132-LP	3	43,5	7,40 - 40,00	261,3 - 1412,6	132	180	74
iCD132-LP	4	58	4,90 - 34,67	173,0 - 1224,2	132	180	74

The air flow rates have been measured at the following working pressures:

2,5 bar for mod. 3 bar - 3,5 bar for mod. 4 bar.

The data and performances were recorded in accordance with standard ISO 1217.

Noise level measured according to PNEUROP/CAGI



iNNOVATIVE eNERGY sOLUTION



AUTHORIZED DEALER

IES S.r.l.

Registered office

Via M. Kolbe, 15
37044 Legnago (VR) – ITALY

Operational Headquarters

Via del Lavoro, 19
37030 Terrossa di Roncà (VR) – ITALY
Tel. +39 045 7460775

email: info@iesair.com www.iesair.com



AIR COMPRESSOR